



# HP iPAQ h4155 Back Case Replacement

Written By: John Pagliero



## INTRODUCTION

This step-by-step guide illustrates how to remove and replace the back case of a Pocket PC.

---

### TOOLS:

- [iFixit Opening Tools](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Battery removal



- Slide the silver release tab up and simultaneously lift the cover up from the left side.

## Step 2



- Push the tab from left to right to remove the cover.



## Step 3



- Now lift the battery up and away from the device to remove it.

## Step 4 — Back Case




- Remove the four silver screws (T5 x .25 in).

## Step 5




- Remove the single black screw (T5 x .125 in) beneath the HP sticker.

## Step 6

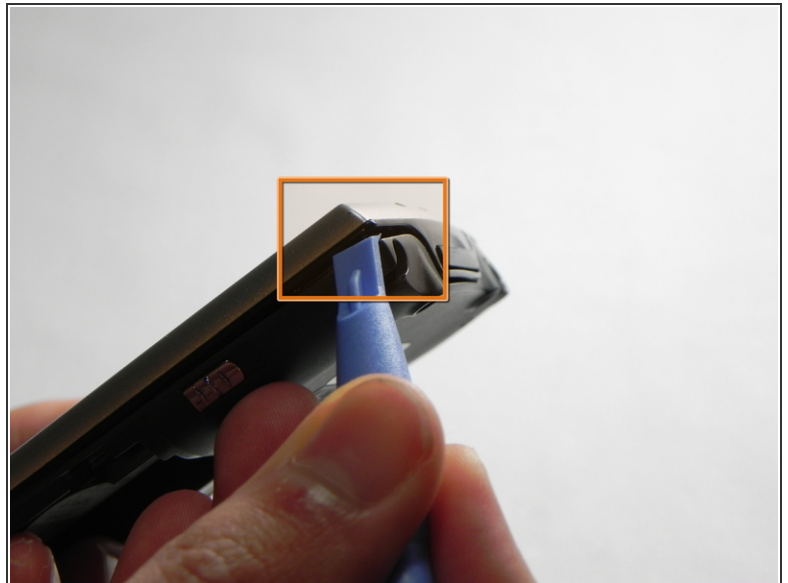

- Next, use your plastic removal tool to separate the gray back from the black center piece.
- For better results, start the separation at the corner piece.

## Step 7

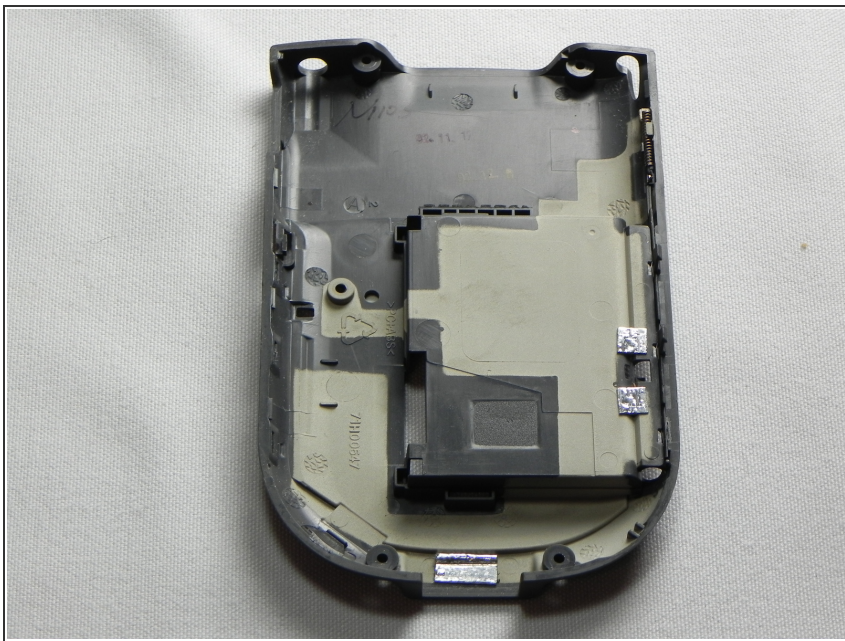

- Remove the back case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-16 12:57:23 AM.